
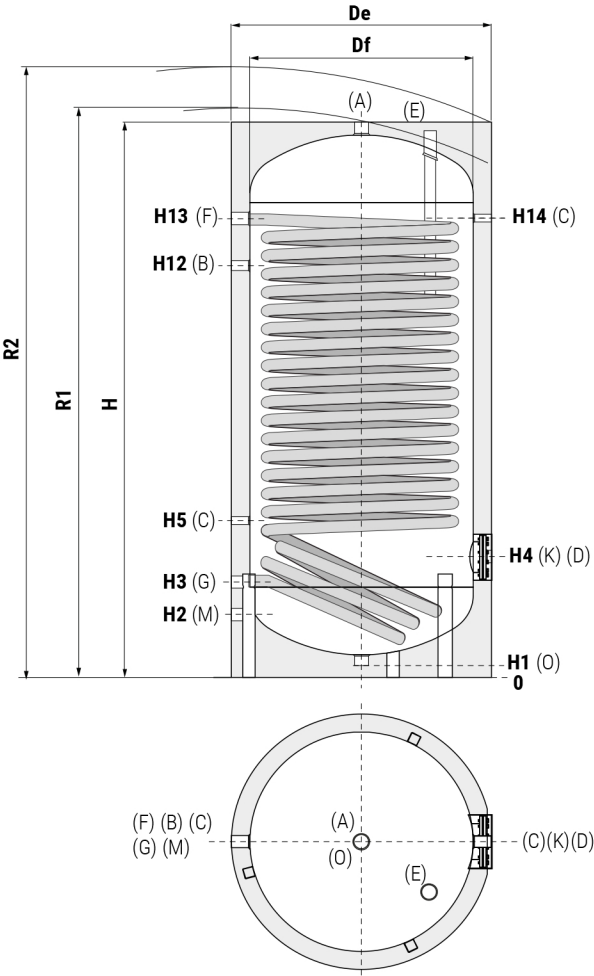


HPC Hőszivattyús használati melegvíz tartály

| Model     | STORAGE |       | HEAT EXCHANGER |        |
|-----------|---------|-------|----------------|--------|
|           | Pmax    | Tmax  | Pmax           | Tmax   |
| 200 ÷ 800 | 10 bar  | 90 °C | 12 bar         | 110 °C |
| 1000      | 8 bar   |       |                |        |



|   |                                          |
|---|------------------------------------------|
| A | Domestic hot water outlet                |
| B | Recirculation                            |
| C | Connection for instrumentation 1/2" G F  |
| D | Connection for electric immersion heater |
| E | Connection for magnesium anode 1"1/4 G F |
| F | Primary circuit inlet 1"1/4 G F          |
| G | Primary circuit outlet 1"1/4 G F         |
| K | Flange for inspection                    |
| M | Domestic cold water circuit inlet        |
| O | Drain 1"1/4 G F - for models <800        |
| P | Drain 3/4" G F - for models >500         |

BOLLY® 1 XL WB +XL WB CLASS A (HARD FOAM INSULATION)

| Model | Volume | Weight | Df   | H    | H (cl.A) | De   | R2   | R2 (cl.A) | H1  | H2  | H3  | H4  | H5  | H12  | H13  | H14  | K           | M             | B    | A     | D     |
|-------|--------|--------|------|------|----------|------|------|-----------|-----|-----|-----|-----|-----|------|------|------|-------------|---------------|------|-------|-------|
|       | [lt]   | [Kg]   | [mm] |      |          |      |      |           |     |     |     |     |     |      |      |      |             |               |      |       |       |
| 200   | 188,8  | 96     | //   | 1440 | 1440     | 550  | 1560 | 1560      | 71  | 215 | 285 | 325 | 405 | 1055 | 1190 | 1190 | Øi120/Øe180 | Connections F |      |       |       |
| 300   | 290,5  | 130    | //   | 1500 | 1500     | 650  | 1650 | 1650      | 71  | 241 | 321 | 381 | 431 | 1091 | 1211 | 1211 | Øi120/Øe180 | 3/4"          | 3/4" | 1"1/4 | 1"1/2 |
| 400   | 422    | 154    | //   | 1780 | //       | 700  | 1930 | //        | 71  | 256 | 336 | 396 | 446 | 1316 | 1471 | 1471 | Øi120/Øe180 | 1"            | 1"   | 1"1/4 | 1"1/2 |
| 500   | 497,4  | 174    | //   | 1800 | 1850     | 750  | 1960 | 2010      | 71  | 266 | 346 | 411 | 466 | 1326 | 1486 | 1486 | Øi120/Øe180 | 1"            | 1"   | 1"1/4 | 1"1/2 |
| 800   | 789,4  | 264    | 750  | 2170 | //       | 900  | 2360 | //        | 101 | 338 | 418 | 483 | 538 | 1548 | 1808 | 1808 | Øi170/Øe240 | 1"            | 1"   | 1"1/4 | 2"    |
| 1000  | 1037,9 | 303    | 850  | 2230 | //       | 1000 | 2460 | //        | 89  | 359 | 439 | 499 | 559 | 1584 | 1829 | 1829 | Øi170/Øe240 | 1"1/4         | 1"   | 1"1/2 | 2"    |

BOLLY® 1 XL WC - DISMOUNTABLE SOFT FLEECE INSULATION

| Model | Volume | Weight | Df   | H    | De   | R1   | R2   | H1  | H2  | H3  | H4  | H5  | H12  | H13  | H14  | K           | M             | B  | A     | D  |
|-------|--------|--------|------|------|------|------|------|-----|-----|-----|-----|-----|------|------|------|-------------|---------------|----|-------|----|
|       | [lt]   | [Kg]   | [mm] |      |      |      |      |     |     |     |     |     |      |      |      |             | Connections F |    |       |    |
| 800   | 789,4  | 226    | 750  | 2190 | 950  | 2330 | 2400 | 101 | 338 | 418 | 483 | 538 | 1548 | 1808 | 1808 | Øi170/Øe240 | 1"            | 1" | 1"1/4 | 2" |
| 1000  | 1037,9 | 255    | 850  | 2250 | 1050 | 2420 | 2500 | 89  | 359 | 439 | 499 | 559 | 1584 | 1829 | 1829 | Øi170/Øe240 | 1"1/4         | 1" | 1"1/2 | 2" |